

# SEWAGE & STORMWATER PUMP STATIONS

## 0.6M SEWAGE PACKAGES



### FEATURES

The 0.6m diameter Sewage pump stations have been designed and engineered for small sewage requirements in many domestic, urban and commercial applications. All packages have a HYFLOW® heavy duty sewage grinder pump installed to ensure durability and long life.

#### COVER:

- > 0.6m x 0.6m Pedestrian Cover (Class A)

#### PUMPS:

- > G50.13
- > HG32.10

#### PIPEWORK & FIT-OUT:

- > The pump will be plumbed to a 40/50 mm discharge on the side of the pit
- > Galvanised steel pump lifting chains and stainless steel shackles
- > Brass isolation valve and swing type check valve

- > Flexible pump discharge hose assembly with stainless steel clamps
- > Heavy duty poly glass quick coupling cam-lock hose connector
- > Stainless steel mount hook for pump chain
- > 40mm conduit kit for 1 x conduit between the pit and controller



25 YEARS INDUSTRY EXPERIENCE

### RANGE


SINGLE PUMP PACKAGE CODES

DEPTH (D)	G50.13.1A.2	HG32.10
	240v	240v
0.75m	835004	835010
1.0m	835005	835011
1.25m	835006	835012
1.5m	835007	835013

#### NOTES

1. Minimum Invert Level for a Single Pump is 700mm to enable reliable operation
2. For full motor protection, pumps must be protected by a manually resettable thermal overload device. Monitor Panel has this functionality)
3. Systems can be customised to suit any application
4. Commissioning is available to carry out start procedures, set levels and verify performance

### PERFORMANCE

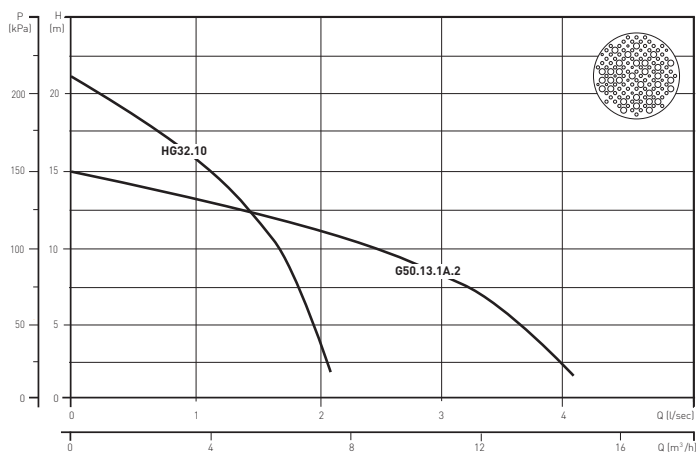


### ADDITIONAL OPTIONS

#### MONITOR PANEL



#### COVERS



#### HIGH LEVEL ALARM

