



HYLIFT® UNDERSINK PUMPS DISHWASHER & WATER SUPPLY INTERLOCK

FEATURES

This All Purpose Pumps unit combines both Dishwasher Interlock and Water Supply Interlock safety options into one unit.

- › Ideal for all Domestic or Commercial application
- › Available for standard 10 amp or large 15 amp dishwashers
- › Available with multiple inputs for 2 x Dishwashers / Appliances
- › Available with 2 x solenoids
- › Maximum operating temperature - 80 °C
- › Maximum operating pressure 1200 kPa
- › Voltage free common alarm output for BMS connection



30 YEARS INDUSTRY EXPERIENCE


RANGE

MODEL	PRODUCT CODE	DESCRIPTION	POWER SUPPLY	SOLENOID PORTS
HYLIFT-D+SI	8650010	Combined Dishwasher and Solenoid Valve Interlock Device	10A GPO (240v)	20mm BSP M
HYLIFT-D+2SI	8650009	Combined Dishwasher and Solenoid Valve Interlock Device with 2 x Solenoids	10A GPO (240v)	20mm BSP M
HYLIFT-2D+SI	8650008	Combined Dishwasher and Solenoid Valve Interlock Device for 2 x 10A Dishwashers	2 x 10A GPO (240v)	20mm BSP M
HYLIFT-2D+2SI	8650011	Combined Dishwasher and Solenoid Interlock Device for 2 x Dishwashers with 2 x Solenoids	2 x 10A GPO (240v)	20mm BSP M
HYLIFT-15AD+SI	8650001	Combined Dishwasher and Solenoid Valve Interlock Device to suit 15A Dishwasher.	15A GPO (240v)	20mm BSP M


NOTE

1. All interlock devices must be connected to a High Level Alarm Device

TYPICAL ARRANGEMENT

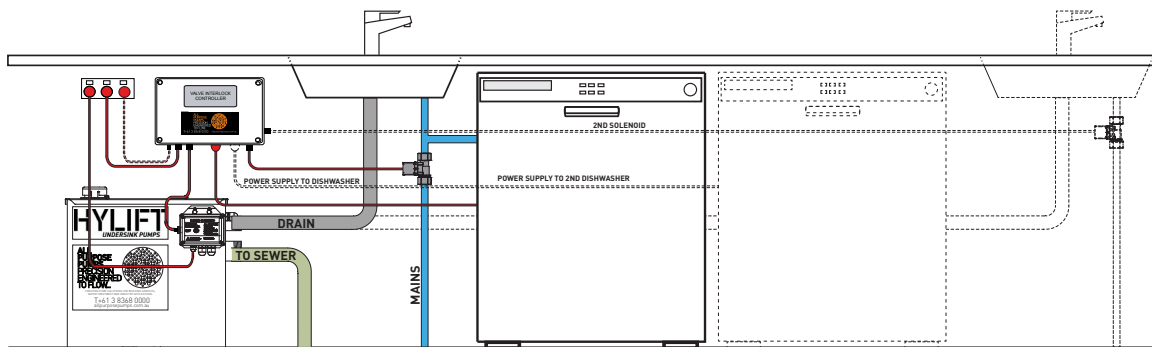

DIMENSIONS

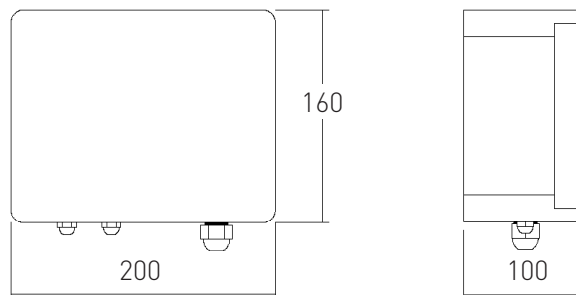

NOTE

1. All dimensions are in mm and are approximate



T +61 3 8368 0000
www.appumps.com.au

HYLIFT
UNDERSINK PUMPS