



# COMPONENTS HOT WATER CIRCULATORS

## FEATURES

The All Purpose Pumps dedicated Hot Water Circulator Controllers provide sophisticated and reliable control of most Water Recirculation requirements.

### HOT WATER CONTROLLER:

- > Powder coated steel lockable IP56 weather resistant enclosure.
- > Control keypad mounted on external door.
- > Removable cable gland plate.
- > Lockable mains power supply isolator switch.
- > Circuit breaker protection.
- > Safety 24 volt low voltage control circuit.
- > DOL pump motor starters.
- > Pump auto/off/manual selection.
- > Pump motor latching thermal overload protection with manual reset.
- > Power saving pump operation programmable time clock control.
- > Automatic pump alternation.
- > Thermostat temperature probe connection terminals.
- > LED indicator lights for:
  - > power on
  - > pump 1 run
  - > pump 1 fault
  - > pump 2 run
  - > pump 2 fault
- > Voltage free common alarm output for BMS connection.
- > 3m flexible lead and 10 amp plug.





**30 YEARS INDUSTRY EXPERIENCE**

## RANGE

PRODUCT CODE	VOLTAGE	OVERLOAD SIZE
520390	240V	0.16 - 0.25 A
520391	240V	0.25 - 0.40 A
520392	240V	0.40 - 0.63 A
520393	240V	0.63 - 1.00 A
520394	240V	1.00 - 1.60 A
520395	240V	1.60 - 2.50 A

## DIMENSIONS

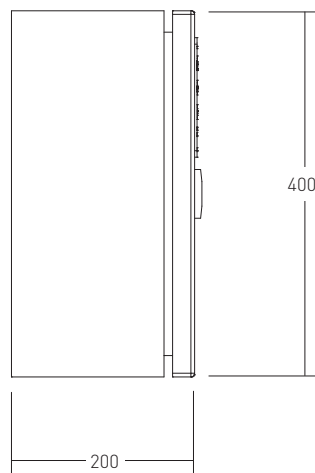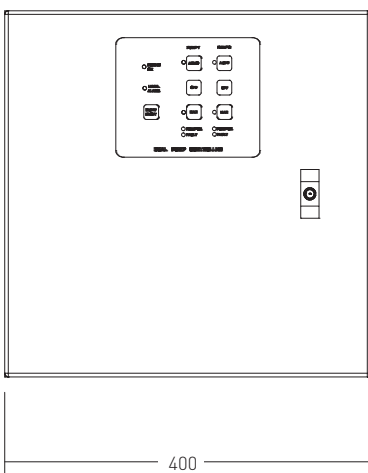

### NOTE

1. All dimensions are in mm and are approximate

