

TRADEWASTE SOLVENT & OIL INTERCEPTION

FEATURES


The All Purpose Pumps interceptor design facilitates a minimum of 1 hour retention time, it slows the flow of tradewaste to reduce the presence of solvents and petrochemical oils by allowing separation of the solvents and oils from the rest of the tradewaste stream.

RANGE

CAPACITY	PRODUCT CODE		INLET / OUTLET	(L)	(W)	(H)
	ABOVE GROUND	BELOW GROUND				
600l	860082		100mm	1400	750	970
1100l	860083		100mm	1900	600	1400
2000l	860084		100mm	2900	900	1170

NOTES

1. Tanks can be made to any size
2. Cover options available for Above & Below ground tanks
3. All dimensions are in mm and are approximate

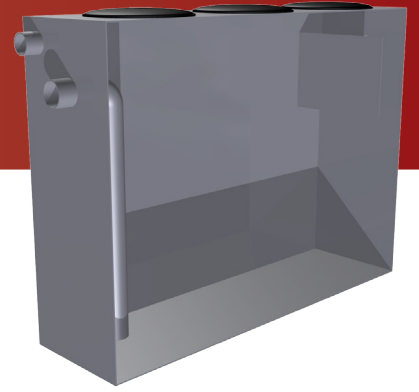

25 YEARS INDUSTRY EXPERIENCE

