


TRADEWASTE STRAINING & COOLING TANK

FEATURES

All Purpose Pumps Straining and cooling tanks are designed to ensure water retention is long enough to allow the water to cool to an acceptable temperature before being discharged to sewer. Available in above or below ground configurations, these systems include a removable basket to trap lint and tradewaste.


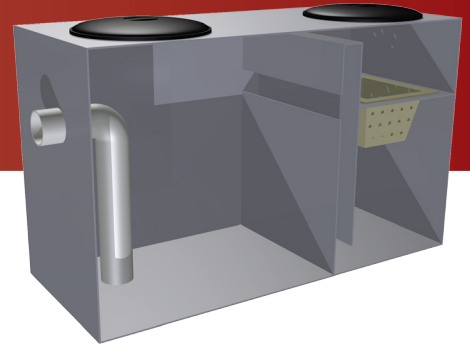


RANGE	PRODUCT CODE		INLET / OUTLET	(L)	(W)	(H)
	ABOVE GROUND	BELOW GROUND				
250 l	860056	860092	100mm	1350	700	900
400 l	860057	860093	100mm	1600	700	950
600 l	860058	860094	100mm	1600	850	1020
1000 l	860059	860095	100mm	2100	850	1150
1500 l	860060	860096	100mm	2100	1000	1350
2000 l	860061	860097	100mm	2500	1000	1400



30 YEARS INDUSTRY EXPERIENCE

DIMENSIONS

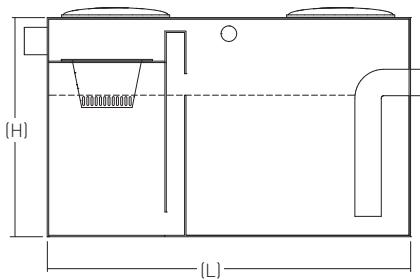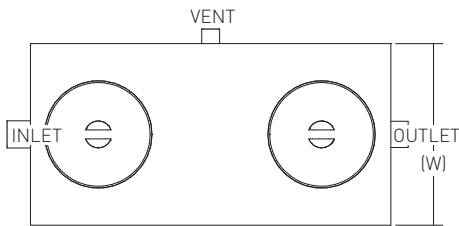

NOTES

1. External dimensions
2. Tanks can be made to any size
3. Cover options available for Above & Below ground tanks
4. All Dimensions are in mm and are approximate

