



HYFLOW® COMMERCIAL HORIZONTAL MULTISTAGE PUMPS

FEATURES

The HYFLOW® Commercial range of horizontal multistage pumps are ideal for domestic, urban and commercial applications and have been manufactured for durability and long life.

- > Full 304 Stainless Steel wet end pump construction
- > Efficient multistage impeller design for reduced running costs
- > TEFC Electric motor
- > Maximum operating temperature: 60°C
- > Fluid operating pressure and temperature: 10bar at 0-40°C, 6 bar at 41-90°C
- > Motor insulation class F
- > Single spring mechanical shaft seal with carbon/ceramic rotating seal faces



30 YEARS INDUSTRY EXPERIENCE


RANGE

	MODEL	PRODUCT CODE		POWER	MAX HEAD	MAX FLOW	INLET / OUTLET
		240v	415v				
1	HCP-HMS 2-20	*	*	0.37kW	200kPa	0.97 l/sec	25mm / 25mm
2	HCP-HMS 2-30	170543	*	0.37kW	280kPa	0.97 l/sec	25mm / 25mm
3	HCP-HMS 2-40	170544	*	0.55kW	390kPa	0.97 l/sec	25mm / 25mm
4	HCP-HMS 2-50	170545	*	0.55kW	480kPa	0.97 l/sec	25mm / 25mm
5	HCP-HMS 2-60	170546	*	0.75kW	560kPa	0.97 l/sec	25mm / 25mm
6	HCP-HMS 4-20	*	*	0.55kW	195kPa	1.94 l/sec	32mm / 25mm
7	HCP-HMS 4-30	170547	*	0.75kW	300kPa	1.94 l/sec	32mm / 25mm
8	HCP-HMS 4-40	170548	*	0.75kW	395kPa	1.94 l/sec	32mm / 25mm
9	HCP-HMS 4-50	170549	*	1.0kW	485kPa	1.94 l/sec	32mm / 25mm
10	HCP-HMS 4-60	170550	*	1.1kW	580kPa	1.94 l/sec	32mm / 25mm
11	HCP-HMS 8-20	*	*	1.0kW	340kPa	2.77 l/sec	40mm / 40mm
12	HCP-HMS 8-30	170551	*	1.85kW	495kPa	2.77 l/sec	40mm / 40mm
13	HCP-HMS 8-40	170552	170553	2.2kW	680kPa	2.77 l/sec	40mm / 40mm

NOTE

1. *Available on request

PERFORMANCE

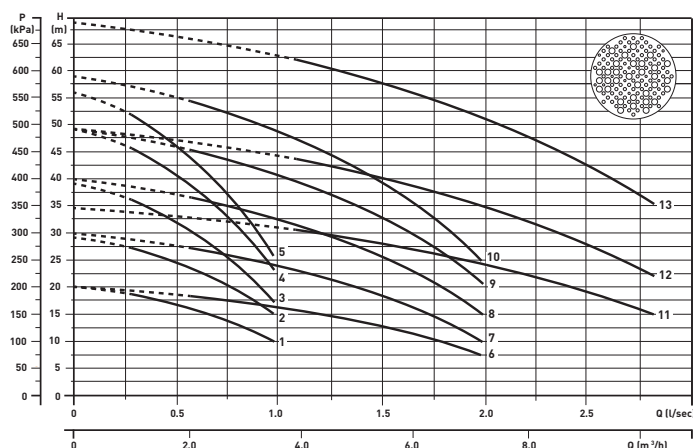

ALL
PURPOSE
PUMPS
PRECISION
ENGINEERED
TO FLOW...



T +61 3 8368 0000
www.allpurposepumps.com.au

HYFLOW
COMMERCIAL PUMPS