



WATER PRESSURE SYSTEMS

4 X PUMPS

FEATURES

The Quad Pump Water Pressure System provides water boosting and is the perfect solution for commercial, high rise apartments, shopping complexes, hospitals and aged care facilities, industry processes, municipal water supply and irrigation. Features Include:

BASE:

- > Common galvanised base plate and controller stand
- > Baseplate and lifting point designed to meet AS4100-1998 and AS1170.1-2002

MANIFOLD:

- > Stainless steel suction and discharge manifolds
- > Pump isolation and non return valves
- > 20mm test and drain valve
- > Stainless steel liquid filled pressure gauge
- > 60 litre pressure accumulator tank
- > Pressure Switch (DOL) / Pressure Sensing Transducer (VSD)

PUMPS:

- > In line vertical multistage pump with standard IEC motors and M.I.P (Maintenance in Place) capabilities
- > Cartridge mechanical shaft seal
- > Vibration isolation rubber mounts
- > AS/NZS 4020 potable water compliant

CONTROLLER:

- > Manufactured in accordance with the relevant standards: AS/NZS 3000:2007, AS1939 1990 and AS 3439.1 2002
- > Fixed Speed (DOL Start)
- > Constant Pressure VSD's (Variable Speed Drives)



30 YEARS INDUSTRY EXPERIENCE


RANGE

PUMP MODEL	POWER (EACH PUMP)	MAX FLOW	MAX HEAD	CONNECTIONS	(L)	(W)	(H)
10-4	1.5 kW	13 l/sec	430 kPa	DN80 PN16	2300	1100	1500
10-6	2.2 kW		650 kPa				
10-8	3.0 kW		860 kPa				
10-10	4.0 kW		1090 kPa				
10-14	5.5 kW		1540 kPa				
15-2	2.2 kW	24 l/sec	280 kPa	DN100 PN16		1100	1500
15-3	3.0 kW		420 kPa				
15-4	4.0 kW		560 kPa				
15-6	5.5 kW		830 kPa				
15-8	7.5 kW		1120 kPa				
15-11	11 kW		1580 kPa				
20-2	2.2 kW	32 l/sec	290 kPa	DN150 PN16		1100	1500
20-3	4.0 kW		430 kPa				
20-5	5.5 kW		720 kPa				
20-7	7.5 kW		1030 kPa				
20-10	11 kW		1490 kPa				
32-2	3.0 kW	44 l/sec	300 kPa	2950	1300	1500	
32-3	5.5 kW		590 kPa				
32-4	7.5 kW		780 kPa				
32-6	11 kW		1180 kPa				
32-8	15 kW		1510 kPa			1590	

NOTES

1. Flange's may change depending on incoming mains pressure.
2. Allow additional 500mm length when rotating controller
3. Systems can be customised to suit any application






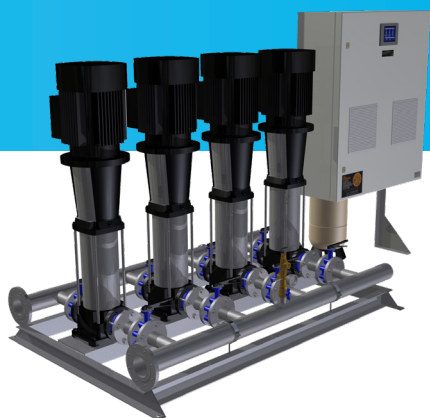

DIMENSIONS

NOTE

1. All dimensions are in mm and are approximate

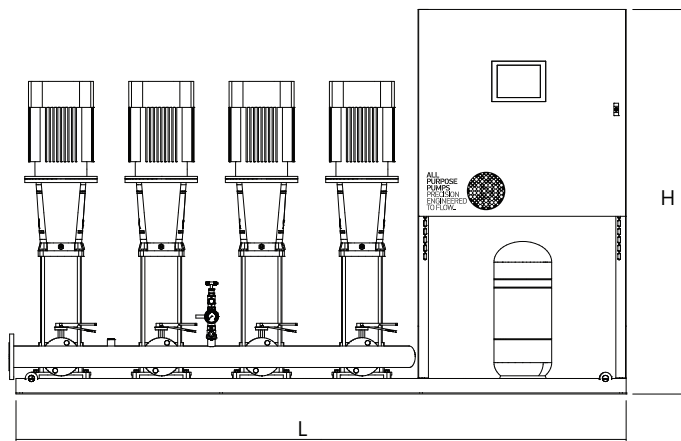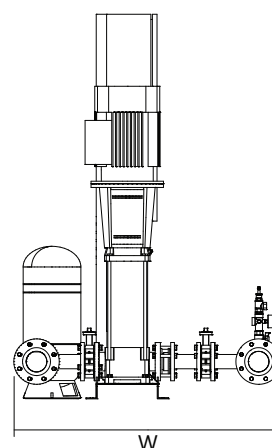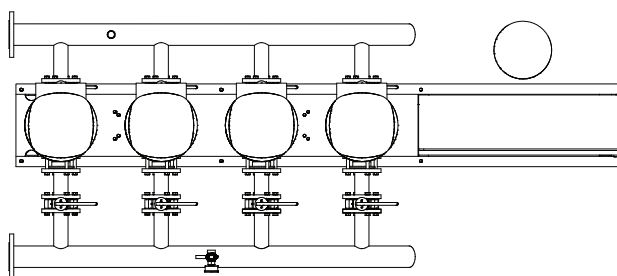

ADDITIONAL OPTIONS

PRODUCT	DESCRIPTION
	BREAK TANK For mains water buffering
	SCREEN FILTRATION For filtering impurities from the water supply
	PUMP ENCLOSURE Protection from the elements as well as security against tampering
	TANK LEVEL CONTROL System controllability
	LEVEL INDICATION System communication
	REMOTE MONITORING MANAGEMENT (RMM) Remote pump system management

APP ADVICE



M.I.P (Maintenance in Place)
Heavy duty pumps with industry standard motors (not extended shaft design)

BENEFIT

Pump mechanical seal and motor can be replaced on site without removing the pump from the pipework.



Variable Speed Controller
1. Industry standard variable speed drives
2. Manufactured to Australian Electrical Standards

1. The equipment can be serviced and replaced without the limitation of proprietary expertise and parts.
2. Ensures that your equipment complies with the regulatory requirements of AS/NZS 3000

