



HYLIFT® UNDERSINK PUMPS

HYLIFT® 70

FEATURES

Compact and easy to install, the All Purpose Pumps HYLIFT® 70 units come fully assembled and plug directly into a standard electrical outlet. The heavy duty pump easily handles domestic and commercial waste and has been selected for its high performance & extremely quiet operation.

- > WaterMark Certified complying the WMTS 106:2019. Certification N°: 23399.
- > Durable 70 litre stainless steel tank
- > 240v submersible pump options for handling of large solids and fibres, high heads, long distances and corrosion resistance
- > Compact design, supplied fully assembled with all connection points on one face
- > Single trade installation, complete with 2 metre power cable and standard 3 pin, 240v 10 amp plug
- > Odour filter and anti flood valve accessory* (included)
- > Audible / Visual high level warning alarm, 4 Mountable Positions voltage free common alarm output for BMS connection
- > 50mm FBSP Inlet
- > 32mm FBSP Discharge




35 YEARS INDUSTRY EXPERIENCE


RANGE

MODEL	PRODUCT CODE	PUMP	MAX. SOLIDS HANDLING	MAX. HEAD	VOLTAGE/KW	ADDITIONAL FEATURE
HYLIFT-70	8650026	HV32.04.1A.2	20mm	8.0m	240V / 0.4kW	-
HYLIFT-70HVS075	8650031	HVS50.075.1A.2	35mm	11m	240V / 0.75kW	316 S/S Pump, Chamber & Valves
HYLIFT-70HD075	8650028	HD50.075.1A.2	10mm	13.5m	240V / 0.75kW	Higher Head

PERFORMANCE

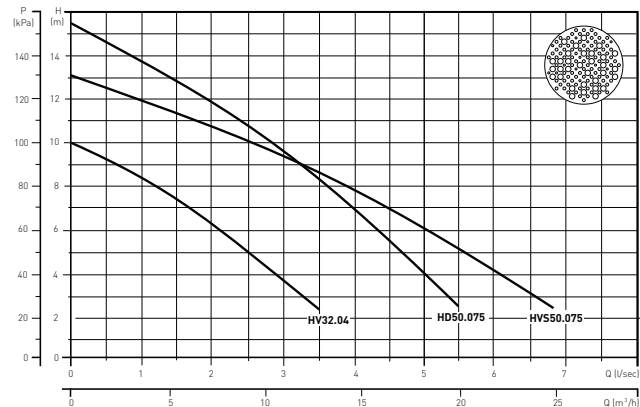

DIMENSIONS

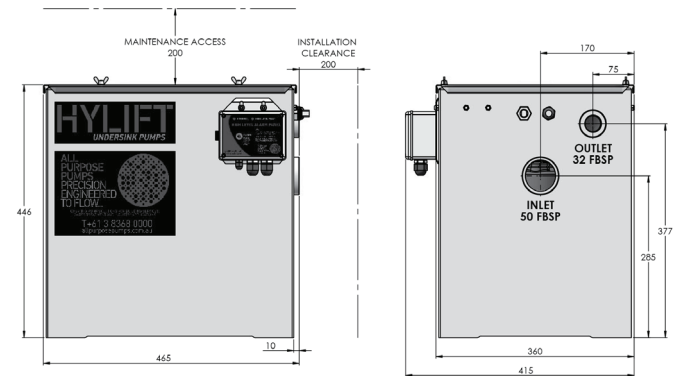

NOTES

1. Dimensions in mm and are approximate
2. Allow minimum of 200mm above unit for maintenance
3. High level alarm needs weather protection if mounted outside

HYLIFT APPLICATION GUIDELINE

Based on typical offline amenities-application


HYLIFT 40	HYLIFT 70
<ul style="list-style-type: none"> > Tight spaces and less demanding applications > Suitable for 1-30 people with one dishwasher. 	<ul style="list-style-type: none"> > High-use applications including restaurants, large office spaces, greasy and fatty wastes. > Suitable for 1-80 people with two dishwashers.

FLOOD PROTECTION & SAFETY DEVICES

- > Audible / Visual High level alarm with flexible positioning (Optional)
- > Flood Prevention Safety interlock kits (Optional - Requires High Level Alarm)
- > Unique combined Odour Filter and anti flood valve.

MAXIMUM HEIGHT & RUN CAPABILITY

HYLIFT 70 MODEL ONLY

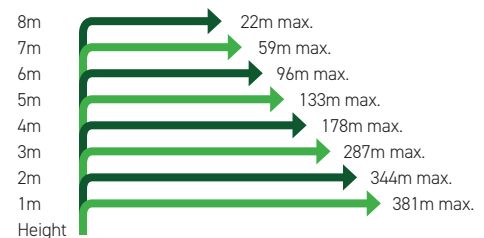

*NOTES

1. Chemical, thinners and acidic based products will reduce the Filter service life.
2. Chart for HV32 Pump shown. Heavy Duty HD50 and HV50 pumps will exceed this capability.

