ASSEMBLY - SPRINKLER JACKING PUMP

OVERVIEW


Dominator Sprinkler Jacking pumps are a robust compact pumping unit designed to automatically maintain pressures in sprinkler installations.
All Purpose Pumps manufacture and test these units to ensure reliable performance and ease of installation.

TECHNICAL:

- Fitted with Orifice to limit flow to 10 L/min
- 1600 kPa rated components
- Lockable valves fitted with compliant 003 padlocks
- Comes with 1m flying lead
- Mechanical Seal
- 240v 1~ Power
- 12 Month Warranty (T&C's Apply)
- Factory wired & pressure tested


OPTIONAL EXTRAS:

- Dual Discharge Outlet
- Pressure Tank
- External Installation Upgrade - Motor Cover
- Controller (compliant to AS2941-2013)

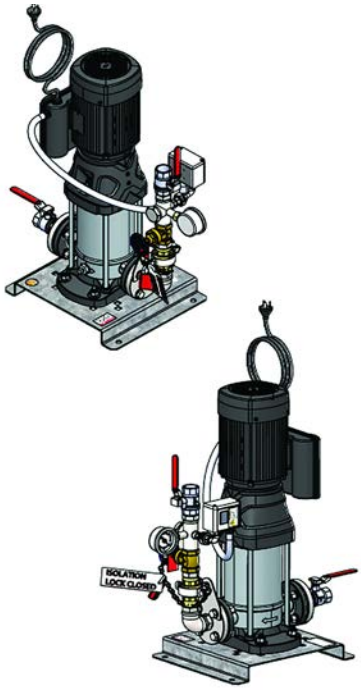

STOCKCODE	DESCRIPTION	Shut Head (kPa)	Max Working Pressure (kPa)	Nominal Press/ flow	Pressure @10lpm (kPa)	Motor (kW)	WEIGHT (kg)
DOMINATOR-FPS-07-004	Assembly-Dominator-VX3-6 Sprinkler Jacking Pump	441	1600	50lpm@343kPa	437	0.55	35
DOMINATOR-FPS-07-005	Assembly-Dominator-VX3-9 Sprinkler Jacking Pump	661	1600	50lpm@520kPa	658	1.1	40

DOMINATOR-FPS-07-004 (VX3-6 shown)

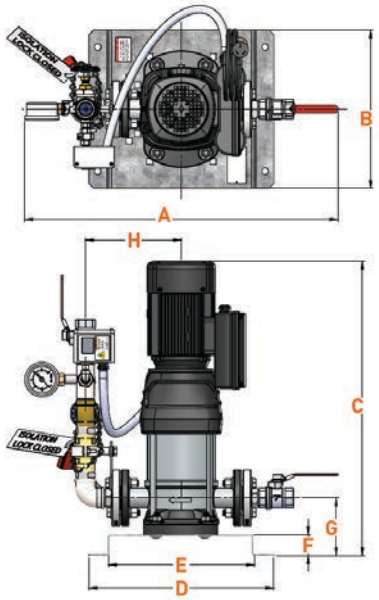

Pressures are nominal values from the pump manufacturer's published curves (20 °C water). Individual pumps may vary within the ISO 9906:2012 Grade 3B tolerance.

DIMENSION (mm)		VX3-6	VX3-9
A	Overall length	643	643
B	Overall width	325	325
C	Overall height	604	705
D	Base length (overall)	380	380
E	Base length (between feet)	300	300
F	Base height	43	43
G	Inlet / outlet centre height	119	119
H	Pump centre to discharge riser	197	197

All dimensions in mm. Letters refer to the views on the left.
VX3-9 is the same as the VX3-6 shown, except height C.